

Overview of elements 2022



Ordering Information | Dimensional drawings

Ordering correctly

Necessary Order Information

Complete and accurate data is absolutely necessary for the processing and production of your order, since an accurate and clear order allows us to immediately begin processing your order without time-consuming enquiries.

For this reason, your order must contain the following information:


- · Range name and front number
- · Handle number
- · Drill pattern number
- · Carcase colour number
- Plinth height and colour

(if not specified, the standard plinth height of 150 mm will be supplied)

- · Worktop design / décor
- Worktop edge design / edge colour
- Worktop sketch with dimensions and indication of tongue and groove joints
- Design of the worktop outer corner (for APD): square or round
- Upright / top shelf design including the colour number and upright thickness / Upright panel floor seal colour
- Shelf colours
- Glass design and / or colour
- · Roll-up front colour
- Cornice profile / light pelmet profile including colour for each
- Order number and / or abbreviation
- Manufacturer information and built-in appliance model identification
- Kitchen block number (for kitchen block orders)
- · Layout sketch with dimension information in 1:20 ratio
- Please draw / write any special productions in the centre of the layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe. The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black. If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.



The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

carcase height

- + plinth height
- 8 mm interior chamfering of the floor profile
- = material height

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 or 200 mm Plinth height:

Base units



Base unit

1 continuous door 1 shelf

UD 20/30/40/45/50/60 cm



Base unit

1 pinned door, 1 shelf

U 20/30/40/45/50/60 cm



Base unit

2 continuous doors. 1 shelf

UD 80/90/100/120 cm



Base unit

2 pinned doors, 1 shelf


U 80/90/100/120 cm



Base unit

- 1 drawer 1 door
- 1 shelf

US 30/40/45/50/60 cm



Base unit

- 2 drawers
- 2 doors. 1 shelf

US 80/90/100/120 cm



Base unit

- 1 drawer.
- 2 doors, 1 shelf
- USG 80/90/100/120 cm



Pull-out unit

- 1 drawer
- 2 pull-outs

UA 30/40/45/50/60/80/90/100/120 cm



Drawer unit

3 drawers, 1 pull-out

U3SA 30/40/45/50/60/80/90/100/120 cm



Pull-out unit

- 1 pull-out.
- 1 continuous front,
- 2 hanging baskets with wooden bottoms

UAMD 20/30 cm



Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR 15/20/30/40/45/50/60 cm


Corner base units



Corner base unit

2 continuous doors opening angle: 165°, 1 shelf

UDTE 80/90 cm



Corner base unit

2 pinned doors, opening angle: 165°. 1 shelf

Corner base unit as

UTE 80/90 cm



carousel unit

2 continuous fronts. carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360°. height adjustable top shelf



UEK 80/90 cm

Corner base unit as carousel unit

2 pinned fronts. carcase height: 750 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360°, height adjustable top shelf



Chamfered corner base unit

1 continuous door, 1 shelf

UED 80/90 cm



Chamfered corner base unit

- 1 pinned door, 1 shelf
- **UE** 80/90 cm

Half corner base units



UED90-40 UED90-45 UED100-50 UED100-60

Corner base unit

1 continuous door 1 shelf, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions: 650 - 750 x ... UED90-40:..x 1050-1150 mm UED90-45:..x 1100-1200 mm UED100-50:..x 1150-1250 mm

UED100-60:..x 1250-1350 mm



UF90-40 UE90-45 UE100-50 UE100-60

Corner base unit

1 drawer, 1 door, 1 shelf 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions:

650 - 750 x ...

UE90-40:..x 1050-1150 mm UE90-45:..x 1100-1200 mm UE100-50:..x 1150-1250 mm UE100-60:..x 1250-1350 mm



UEDSA90-45 UEDSA100-50 UEDSA100-60

Corner unit with swivel pull-out

1 continuous door 2 tablar shelves with metal railing, height adjustable, 1 angle filler Carcase widths: 900. 1000 mm Planning dimensions: 650 - 750 x ... UE*90-45:..x 1100-1200 mm UE*100-50:..x 1150-1250 mm UE*100-60:..x 1250-1350 mm



UESA90-45 UESA100-50

UESA100-60

Corner unit with swivel pull-out

1 drawer, 1 door.

2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions: 650 - 750 x ...

UE*90-45:..x 1100-1200 mm UE*100-50:..x 1150-1250 mm UE*100-60:..x 1250-1350 mm



UESAV90-45 UESAV100-50 UESAV100-60

Corner unit with swivel pull-out 1 pinned door,

2 tablar shelves with metal railing, height adjustable, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions: 650 - 750 x ... UE*90-45:..x 1100-1200 mm UE*100-50:..x 1150-1250 mm UE*100-60:..x 1250-1350 mm



Surcharge for dishwasher recessed filler on fillers and half-corner units, side panel made of

carcase material, carcase depth: 561 mm


MP-GS

Base units

Carcase depth: 561 mm Carcase height: 720 mm

70, 100, 150 oder 200 mm Plinth height:

Angle fillers



Angle filler

Continuous front material, 70 x 70 mm, planning dimensions: 650 x 650 mm

as above however variable from 50 to 170 mm, planning dimensions: 630 - 750 mm 1st dimension = left / 2nd dimension = right



Surcharge for dishwasher recessed filler on fillers and half-corner

units, side panel made of carcase material. carcase depth: 561 mm

Fillers / Panelling



Filler

Carcase material, 720 mm high, U-shaped seal for connection to wall width: 100/200 mm

UPK 10/20 cm



Front filler

Continuous front material, width: 200 mm

UPD 20 cm



RK-72



RKS-72

Base unit back panel

16 mm thick. 720 mm high, width: 250 - 2000 mm, available in all carcase and worktop décors from décor group 1,

Vario clip fastening, in case of reproduction finishes vertical wood grain



as above, however, continuous height, including floor profile: 70 mm plinth height:

810 mm 100 mm plinth height: 840 mm

150 mm plinth height: 890 mm 200 mm plinth height:

940 mm

Available floor profile colours:

010 Black 014 Stainless steel appearance



Base unit back panel

1 continuous front design, 720 mm high, Vario clip fastening. without drill hole

RFD-72 30/40/45/50/60/80/90 cm

Cooker housing



Cooker housing

1 fixed panel, side sections: 177 mm deep, aperture dimension: 591 mm

HU 60 cm



Cooker housing

1 fixed panel. aperture dimension: 598 mm

HUB 60 cm



Cooker housing

1 plastic drawer. 16 I capacity, interior dimensions: 485 x 480 x 68 mm, aperture dimension: 598 mm



HUG 60 cm

Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm, aperture dimension: 598 mm

Hot plate units



Hot plate unit

1 internal panel, 1 construction shelf for heat insulation. 1 door,

KD60 60 cm

K60 60 cm

1 shelf



Hot plate unit

1 fixed panel, 1 construction shelf for heat insulation, 1 door

1 shelf

1 shelf



Hot plate unit

1 drawer,

spacer shelf for hot plate,

KS60 60 cm




Hot plate unit

1 drawer,

1 spacer shelf for hot plate, 2 pull-outs

KS2A 60/80/90/100/120 cm



Hot plate unit

1 internal panel, 1 construction shelf for heat insulation, 2 pull-outs

60/80/90/100/120 cm

Sink units



Sink base unit

1 internal panel, 1 continuous door

SPUD 40/45/50/60 cm



Sink base unit

1 fixed panel 1 door

SPU 40/45/50/60 cm



Sink base unit

2 internal panels, 2 continuous doors

SPUD 80/90/100/120 cm



Sink base unit

2 fixed panels, 2 doors

SPU 80/90/100/120 cm



SPUAD 40/45/50/60 cm Sink base unit

1 internal panel, 1 continuous front with centred handle, without pull-out rails and drill holes



Sink base unit

1 fixed panel, 1 front with centred handle, without pull-out rails and drill holes

SPUA 40/45/50/60 cm



SPUDA-ASK 45/50/60 cm



Sink base unit Separato-K

1 internal panel, 1 pull-out, 500 mm deep, with waste separation system

Separato-K with pull-out lid, 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers, 1 bio lid (for all widths)

Doors for integrated appliances



Door

for integrated dishwashers without handle

GSB 45/60 cm



Continuous door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs

GSBD*-I 45/60 cm



Pinned door for fully integrated dishwashers.

built-under fridge and freezer units with pull-outs

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Base units



XL Base unit

1 continuous door 2 shelves

UD*-X 20/30/40/45/50/60 cm



XL Base unit

1 pinned door, 2 shelves

U*-X 20/30/40/45/50/60 cm



XL Base unit

2 continuous doors. 2 shelves

UD*-X 80/90/100/120 cm



XL Base unit

2 pinned doors, 2 shelves

U*-X 80/90/100/120 cm




XL Base unit

1 drawer

1 door 1 shelf

US*-X 30/40/45/50/60 cm



XL Base unit

2 drawers.

2 doors. 1 shelf

US*-X 80/90/100/120 cm



XL Base unit

1 drawer

2 doors,

1 shelf

USG*-X 80/90/100/120 cm



XL Pull-out unit

1 drawer,

2 pull-outs

UA*-X 30/40/45/50/60/80/90/100/120 cm



XL Drawer unit

3 drawers,

1 pull-out

U3SA*-X 30/40/45/50/60/80/90/100/120 cm



XL Pull-out unit

1 pull-out,

1 continuous front,

2 hanging baskets with wooden bottoms

UAMD*-X 20/30 cm



XL Open shelf base unit

2 fixed shelves. side depth: 582 mm

UR*-X 15/20/30/40/45/50/60 cm


XL Corner base units



XL Corner base unit

2 continuous doors opening angle: 165°, 2 shelves

UDTE*-X 80/90 cm



XL Corner base unit 2 pinned doors. opening angle: 165°.

2 shelves

UTE*-X 80/90 cm



XL Corner base unit as carousel unit

2 continuous fronts. Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Corner base unit as carousel unit

2 pinned fronts. Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf



XL Chamfered corner base

1 continuous door, 2 shelves

UED*-X 80/90 cm



XL Chamfered corner base unit

1 pinned door. 2 shelves

UE*-X 80/90 cm

XL Half-corner units



UED90-40-X UED90-45-X UED100-50-X UED100-60-X

XL Corner base unit

1 continuous door 2 shelves

1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions:

650 - 750 x ... UED90-40-X:...x 1050-1150 mm UED90-45-X:...x 1100-1200 mm UED100-50-X:...x 1150-1250 mm

UED100-60-X:...x 1250-1350 mm



UF90-40-X UE90-45-X UE100-50-X UE100-60-X

XL Corner base unit

1 drawer

1 door

1 shelf, 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions:

650 - 750 x ...

UED90-40-X:...x 1050-1150 mm UED90-45-X:...x 1100-1200 mm UED100-50-X:...x 1150-1250 mm UED100-60-X: x 1250-1350 mm



UEDSA90-45-X UEDSA100-50-X UEDSA100-60-X

XL Corner unit with swivel pull-out

1 continuous door, 2 wooden swivel tablars with metal railing. height adjustable. 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions:

650 - 750 x ... UE*90-45-X:...x 1100-1200 mm

UE*100-50-X:...x 1150-1250 mm UE*100-60-X:...x 1250-1350 mm



UESA90-45-X UESA100-50-X UESA100-60-X

XL Corner unit with swivel pull-out

1 drawer.

1 door.

2 wooden swivel tablars with metal railing, height adjustable. 1 angle filler

Carcase widths: 900, 1000 mm Planning dimensions: 650 - 750 x ...

UE*90-45-X:...x 1100-1200 mm UE*100-50-X:..x 1150-1250 mm UE*100-60-X:...x 1250-1350 mm



UESAV90-45-X UESAV100-50-X UESAV100-60-X

XL Corner unit with swivel pull-out

1 pinned door, 2 wooden swivel tablars with metal railing, height adjustable. 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions: 650 - 750 x ...

UE*90-45-X:...x 1100-1200 mm UE*100-50-X:...x 1150-1250 mm UE*100-60-X:...x 1250-1350 mm



Surcharge for recessed fillers for fillers and half corner


units, side section of carcase material, in carcase height, carcase depth: 561 mm

Base units in XL height

Carcase depth: 561 mm Carcase height: 792 mm

70, 100, 150 or 200 mm Plinth height:

XL Angle fillers



XL Angle filler

Continuous front material, 70 x 70 mm, Planning dimensions: 650 x 650 mm

as above however variable from 50 to 170 mm, Planning dimensions: 630 - 750 mm 1st dimension = left 2nd dimension = right



Surcharge for recessed fillers

for fillers and half corner units, side section of carcase material. in carcase height, carcase depth: 561 mm

XL Fillers / Panelling



XL Filler

Carcase material, 792 mm high, U-shaped seal for connection to wall. width: 100/200 mm

UPK*-X 10/20 cm



XL Front filler

Continuous front material, width: 200 mm

UPD*-X 20 cm





XL Base unit back panel

16 mm thick, 792 mm high. width: 250 - 2000 mm. available in all carcase and worktop décors from décor group 1, Vario clip fastening, in case of reproduction finishes vertical wood grain



as above, however, continuous height. including floor profile: 70 mm plinth height:

882 mm 100 mm plinth height: 912 mm 150 mm plinth height: 962 mm 200 mm plinth height: 1012 mm

Available floor profile colours:

010 Black 014 Stainless steel appearance



XL Base unit back panel 1 continuous front.

789 mm high, Vario clip fastening, without drill holes

XL Cooker housings



XL Cooker housing

1 fixed panel. aperture dimension: 595 mm



HUS*-X 60 cm

XL Cooker housing

1 plastic drawer. 16 I capacity. interior dimensions: 485 x 480 x 68 mm aperture dimension: 595 mm



XL Cooker housing

1 large-capacity drawer with second level for baking trays, plastic, 30 I capacity, interior dimensions: 480 x 380 x 150 mm, aperture dimension: 595 mm

XL Hot plate units



XL Hot plate unit

1 internal panel,

1 construction shelf for heat insulation.

1 door.

2 shelves



XL Hot plate unit 1 fixed panel,

1 construction shelf for heat insulation,

1 door

1 shelf



XL Hot plate unit

1 drawer. spacer shelf for hot plate,

1 door.

1 shelf



141

285

357

KS2A*-X

XL Hot plate unit

1 drawer.

1 spacer shelf for hot plate,

2 pull-outs

XL-Doors for integrated appliances



GSBD*-I-X 45/60 cm

60/80/90/100/120 cm

dishwashers.

for fully integrated built-under fridge and freezer units with pull-outs, includes spacer strip

Continuous XL door



Pinned XL door

for fully integrated dishwashers, built-under fridge and freezer units with pull-outs, includes spacer strip

XL Sink base units



XL Sink base unit

1 internal panel, 1 continuous door

SPUD*-X 40/45/50/60 cm



XL Sink base unit

1 fixed panel,

1 door

SPU*-X 40/45/50/60 cm



XL Sink base unit 2 internal panels.

2 continuous doors

SPUD*-X 80/90/100/120 cm



XL Sink base unit

2 fixed panels, 2 doors

SPU*-X 80/90/100/120 cm



40/45/50/60 cm

XL Sink base unit 1 internal panel,

1 continuous front with centred handle without pull-out rails and drill holes



XL Sink base unit

1 fixed panel, 1 front with centred handle. without pull-out rails and drill holes

SPUA*-X 40/45/50/60 cm



SPUDA-ASK*-X

45/50/60 cm



XL Sink unit Separato-K 1 internal panel,

1 pull-out, 500 mm deep, with waste separation system Separato-K

with pull-out lid. 1 x 18 and 2 x 8 litres, 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers, 1 bio lid (for all widths)



SPUA-ASK*-X 45/50/60 cm

XL Sink unit Separato-K 1 fixed panel,

1 pull-out, 500 mm deep, with waste separation system Separato-K

with pull-out lid, 1 x 18 and 2 x 8 litres. 500 mm width: with 1 side organiser, 600 mm width: with 2 side organisers, 1 bio lid (for all widths)

Worktops | Niche cladding

Worktops



APN 60/70/80/90/100/ 110/120 cm

Worktop APN with N-edge

rounded front edge, sides sealed with straight décor edge. Price per running 100 mm, every 100 mm started will be invoiced. Maximum 5100 mm wide. Please quote the décor number in your order.



60/70/80/90/100/ 110/117 cm

Worktop APD with décor edge

front and side edges coated with straight décor edging material, 1.5 mm thick. Price per running 100 mm, every 100 mm started will be invoiced. Maximum 5100 mm wide. Please quote the décor and edge colour number in your

Worktop processing



AP-R

Surcharge for exterior and interior roundings deviating from the standard radii on worktops



APN-A APN-AS APD-A

Surcharge for chamfered

on worktops and tables, including edging



AP-NF

Tongue and groove joint for worktop corners or extensions.

incl. screw fittings, tongues and water resistant



Cut-outs for built in hobs, sinks or ventilation grills

AP-AUS



AP-IEK

Surcharge for inner corners in square design on worktops and tables with décor edge

Niche cladding



NV 52 NV 54 NV 70

Niche cladding coated on both faces, 16 mm thick, horizontal structure (except 226 Metal art décor, 273 Carrara marble reproduction. 274 Teramo marble reproduction) with edge on all sides,

heights: NV52 for niches beneath wall units of height 1 NV54 for niches beneath wall units of height 2 and 3

width: 250 - 2580 mm

NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above, however with deviating dimensions acc. to sketch max 2580 mm wide 2030 mm high, 1st dimension in direction

of grain coated edge all round. Minimum price: 0.5 m², minimum dimensions: 250 x 200 mm, invoiced per m².

Accessories for niche cladding



NPUK 500

Plastic cover profile in translucent appearance for niche or back panel cladding, 16 mm thick, self-adhesive, 5000 mm long



WAPN 200/400/500 cm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep, delivered as strand

material.

Available in:

014 Stainless steel appearance, 010 Black



WAPN-Z

WAPN accessory bag matches the plastic upstands WAPN

consisting of: 4 x interior corner 90° /

2 x interior corner 135° 2 x exterior corner 90° 2 x set of end caps for

WAPN

2 x set of end caps for niche cladding

Available in:

014 Stainless steel appearance, 010 Black



NKPU 200 / 400

Aluminium profile, 2-piece with sealing profile for niche and back panel cladding or as upstand,

17 mm high, 20 mm deep

Available in:

dimensions:

014 Stainless steel appearance, 010 Black



NKPO 200 / 400

Niche profile on top aluminium profile, stainless steel appearance for niche cladding incl. 1 set of end caps (left / right), dimensions: 16 mm high, 16 mm deep



NKP-Z

NKP accessory bag matches upstand NKPU

Available in:

014 Stainless steel appearance, 010 Black



1 set of end caps matching aluminium profile for niche cladding NKPO

NKP-EK

Upright panels | Top shelves | Wall shelf units

Upright panels for base units



Upright at end of run incl. floor profile in 014 Stainless steel appearance or 010 Black, depth: 583 mm

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm



UWR 10/16/25/50 mm

Upright for room designs depth: 250 to 1166 mm. edged on both sides, incl. floor profile in 014 Stainless steel appearance or 010 Black

Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm

XL Upright panels for base units



UWA-X 10/16/25/50 mm

XL Upright at end of run incl. floor seal in 014 Stainless steel appearance or 010 Black, depth: 583 mm

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm



XL Upright for room designs depth: 250 to 1166 mm. edged on both sides, incl. floor seal in 014 Stainless steel appearance or 010 Black

Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm

Wall shelf units



WB25 30/40/45/50/ 60/65/80/90/ 100/120 cm

Plug-in wall shelf, 25 mm thick Carcase material, polymer edging all around, . 255 mm deep, incl. metal plug fitting



VB16 100 cm

Wall shelf unit with shelf holders. 16 mm thick 255 mm deep polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VBH5

VB16 258 cm

Wall shelf unit with shelf holders as above, however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black

014 Stainless steel appearance

Upright panels for wall units



Upright at end of run / intermediate upright for wall units, heiaht 1 depth: 372 mm, height: 720 mm

WW 10/16/25/50 mm -1



Upright at end of run / intermediate upright for wall units, height 2 depth: 372 mm, height: 792 mm

WW 10/16/25/50 mm -2



Upright at end of run / intermediate upright for wall units. height 3 depth: 372 mm, height: 864 mm

WW 10/16/25/50 mm -3

Top shelves



Top shelf, 10 mm thick, for side- or highboard coated on both faces. polymer edged on front and sides, length: 250 - 2580 mm



for side- or highboard coated on both faces, polymer edged on front ADB16 38/59/117 cm and sides, length: 250 - 2580 mm

Top shelf.


Top shelf.

25 mm thick.

16 mm thick,



for side- or highboard coated on both faces, polymer edged on front and sides. length: 250 - 2580 mm



Top shelf, 50 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm

VB25 100 cm

Wall shelf unit with shelf holders. 25 mm thick 255 mm deep. polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VRH5

VB25 258 cm

Wall shelf unit with shelf holders as above. however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance



VB50 100 cm

Wall shelf unit with shelf holders. 50 mm thick 255 mm deep. polymer edging all round, available in widths from 250 mm to 1000 mm, includes 2 shelf holders VRH5

VB50 258 cm

Wall shelf unit with shelf holders as above. however available in widths from 1001 mm to 2580 mm. includes 4 shelf holders VBH5

Available shelf holder colours: 010 Black 014 Stainless steel appearance

Highboards - 1555 / 1585 / 1635 / 1685 mm high

Carcase depth: 561 mm Carcase height: 1485 mm

70, 100, 150 oder 200 mm Plinth height:

XL Highboards - 1654 / 1684 / 1734 / 1784 mm high

Carcase depth: 561 mm Carcase height: 1584 mm

70, 100, 150 oder 200 mm Plinth height:



Highboards



Highboard 2 doors,

- 1 fixed shelf, 3 shelves
- H 30/40/50/60 cm

XL Highboards



XL Highboard

- 2 doors, 1 fixed shelf. 3 shelves
- H*-X 30/40/50/60 cm

Housing for ovens



Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 1 drawer.
- 1 door.
- 1 shelf

GOS

XL Housing for ovens



XL Oven housing aperture height: 590 mm 1 fixed compensation panel,

- 1 drawer.
- 1 door,
- 2 shelves

GDOS-X

Integrated appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm 1 appliance door.

2 pull-outs

XL Integrated appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm 1 appliance door, 2 pull-outs

G88A-X

Integrated appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 pull-out

G123A

XL Integrated appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm 1 appliance door, 1 pull-out

G123A-X

Appliance housings with aperture height up to 1450 mm



Appliance housing for integrated fridge / freezer aperture height: 1450 mm AEG SCB 614 F1 LS

G145S

for Progress PKG 1453 and 2 appliance doors. bottom shelf made of 2 mm sheet steel

Fillers



Carcase material, 1485 mm high, U-shaped seal for connection to wall width: 230 mm

HPK 20 cm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 2 appliance doors

G145-X

XL Fillers



XL Filler Carcase material, 1584 mm high, U-shaped seal for connection to wall, width: 230 mm

Tall units, height 1 - 2067 / 2097 / 2147 / 2197 mm high

Carcase depth: 561 mm 1997 mm Carcase height:

70, 100, 150 oder 200 mm Plinth height:



515 903

Pantry unit

- 3 doors, 2 fixed shelves,
- 4 shelves

H*-1 30/40/50/60 cm



Pantry unit

- 2 doors,
- 1 fixed shelf. 4 shelves
- HDV*-1 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-1 30/40 cm



Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1 30/40 cm



Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials,
- 1 system shelf,
- 1 hose rack for vacuum
- cleaner.
- 2 pegboards

515 903 573

Tall unit

- 1 door,
- 1 lug connected door, 5 internal pull-outs,
- 1 fixed shelf,
- 1 shelf

HI*-1 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

2 doors, 2 shelves

GO-1



Oven housing aperture height: 590 mm

- door,
- 1 drawer,
- 1 door.
- 2 shelves

GOS-1



Oven housing aperture height: 590 mm

- 1 door,
- 1 shelf,
- 1 drawer,
- 2 pull-outs

GOS2A-1



Appliance housing for oven and microwave aperture height: variable

- door,
- 1 shelf,
- 2 variable apertures,
- 1 pull-out

GMO-1



Appliance housing for oven and microwave with lifting door

- aperture height: 370 mm aperture height: 590 mm 1 flap,
- 1 lifting door, 1 door.
- 1 shelf



Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 flap,
- 1 lifting door,
- 2 pull-outs

GLO2A-1

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors,
- 1 appliance door,
- 2 shelves

G88-1



Appliance housing for integrated fridge aperture height: 880 mm

- 1 flap,
- 1 door.
- 1 appliance door,
- 1 shelf

GD88-1



Appliance housing for integrated fridge aperture height: 880 mm

- 1 door,
- 1 shelf,
- 1 appliance door, 2 pull-outs

G88A-1

Appliance housings with aperture height up to 1230 mm



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door,
- 1 shelf

G123-1



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 shelf.
- 1 appliance door,
- 1 pull-out

G123A-1



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door.
- 1 shelf,
- 1 appliance door for freezer compartment,
- 1 internal panel,
- 1 appliance door for fridge section

Tall units, height 1 - 2067 / 2097 / 2147 / 2197 mm high

Carcase depth: 561 mm Carcase height: 1997 mm

Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm

515 1242 VAR

Appliance housing for integrated fridge / freezer aperture height: 1450 mm 2 appliance doors,

1 fixed compensation panel

G145B-1



Appliance housing for integrated fridge / freezer aperture height: 1450 mm for Progress PKG 1453 and AEG SCB 614 F1 LS

1 door, 1 shelf,

G145S-1

2 appliance doors, bottom shelf made of

2 mm thick sheet steel

Fillers / Cladding



Filler

Carcase material, 1997 mm high, U-shaped seal for connection to wall width: 230 mm

HPK20-1 20 cm



Front filler

Continuous front material, width: 200 mm

HPD20-1 20 cm

Appliance housings with aperture height between 1580 - 1780 mm



Appliance housing for fridge / freezer aperture height: 1780 mm 2 appliance doors

GD178-1



Tall units in XL height, height 1 XL - 2139 / 2169 / 2219 / 2269 mm high

Carcase depth: 561 mm Carcase height: 2069 mm

70, 100, 150 oder 200 mm Plinth height:

XL Tall units



XL Pantry unit

- 3 doors, 2 fixed shelves. 4 shelves
- H*-1X 30/40/50/60 cm



XL Pantry unit

- 2 doors,
- 1 fixed shelf,
- 5 shelves
- HDV*-1X 30/40/50/60 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 5 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1X 30/40 cm



XL Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid,
- 2 baskets for cleaning materials,
- HB*-1X 40/50/60 cm
- 1 system shelf,
- 1 hose rack for vacuum
- cleaner.
- 2 pegboards



XL Tall unit

- 1 door.
- 1 lug connected door,
- 5 internal pull-outs,
- 1 fixed shelf,
- 1 shelf

HI*-1X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

2 doors, 3 shelves

GO-1X



XL Oven housing aperture height: 590 mm

- 1 door,
- 1 drawer,
- 1 door,
- 2 shelves

GOS-1X



XL Oven housing aperture height: 590 mm

- 1 door,
- 1 shelf,
- 1 drawer.
- 2 pull-outs

GOS2A-1X



XL Appliance housing for oven and microwave aperture height: variable

- door,
- 1 shelf,
- 2 variable apertures,
- 1 pull-out

GMO-1X



XL Appliance housing for oven and microwave with lifting door

aperture height: 370 mm aperture height: 590 mm 1 flap.

- 1 lifting door,
- 1 door,
- 1 shelf



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm 1 flan

1 lifting door, 2 pull-outs

GLO2A-1X

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 door,
- 1 appliance door,
- 1 door
- 2 shelves

G88-1X

371

903

789



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 appliance door,
- 1 door.
- 2 shelves

GD88-1X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 1 door, 1 shelf,
- 1 appliance door, 2 pull-outs
- G88A-1X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 appliance door,
- 1 door.
- 2 shelves

G123-1X



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door,
- 1 appliance door,
- 1 pull-out

G123A-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 internal panel, 1 appliance door for freezer compartment,
- 1 appliance door for

Tall units in XL height, height 1 XL - 2139 / 2169 / 2219 / 2269 mm high

Carcase depth: 561 mm

Carcase height: 2069 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

1 shelf,

2 appliance doors

G145-1X



XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm 1 appliance door with cut edge for freezer compartment, 1 appliance door for fridge section,

G145A-1X

XL Appliance housings with aperture height between 1580 - 1780 mm

1 pull-out



XL Appliance housing for fridge / freezer aperture height: 1780 mm 2 appliance doors

GD178-1X

XL Fillers / Cladding



XL Filler

Carcase material, 2069 mm high, U-shaped seal for connection to wall width: 230 mm

HPK20-1X 20 cm



XL Front filler

Continuous front material, width: 200 mm

HPD20-1X 20 cm





Tall units, height 2 - 2158 / 2188 / 2238 / 2288 mm high Carcase depth: 561 mm 2088 mm Carcase height:

Tall units

573 933 573

Plinth height:

Pantry unit

70, 100, 150 oder 200 mm

- 3 doors, 2 fixed shelves.
- 4 shelves

H*-2 30/40/50/60 cm



Pantry unit


- 2 doors,
- 1 fixed shelf, 4 shelves

HDV*-2 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-2 30/40 cm



Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2 30/40 cm



HB*-2 40/50/60 cm

Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid, 2 baskets for cleaning materials.
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards



Tall unit

- 1 door,
- 1 lug connected door,
- 5 internal pull-outs,
- 1 fixed shelf,
- 1 shelf

HI*-2 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

- 1 fixed compensation panel,
- 2 shelves

GO-2



Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-2



Oven housing aperture height: 590 mm

- 1 door,
- 1 shelf
- 1 fixed compensation panel,
- 1 drawer,
- 2 pull-outs

GOS2A-2



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door, 1 shelf.
- 1 fixed compensation panel,
- 1 pull-out

GMO-2



Appliance housing for oven and microwave with lifting door aperture height: 370 mm

- aperture height: 590 mm 2 doors.
- 1 lifting door,
- 1 fixed compensation panel,



GLO2A-2

Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 2 shelves

G88-2

429

933

717

573

933 285

285



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 1 shelf

GD88-2



Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf
- 1 appliance door, 2 pull-outs

G88A-2

Appliance housings with aperture height up to 1230 mm



for integrated fridge aperture height: 1230 mm

Appliance housing

- 1 flap,
- 1 internal panel.
- 1 appliance door,
- 1 door.
- 1 shelf



Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door
- 1 shelf
- 1 internal panel
- 1 appliance door,
- 1 pull-out

G123A-2



Appliance housing for integrated fridge / freezer aperture height: 1230 mm 1 door

- 1 shelf
- 1 appliance door for freezer compartment,
- 1 internal panel, 1 appliance door for

Tall units, height 2 - 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm

Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 internal panel,
- 2 appliance doors

GD145-2



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel,
- 2 appliance doors,

G145-2

Fillers / Cladding



Filler

Carcase material, 2088 mm high, U-shaped seal for connection to wall width: 230 mm

HPK20-2 20 cm



Continuous front material, width: 200 mm

HPD20-2 20 cm

Appliance housings with aperture height between 1580 - 1780 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

- 1 flap, 2 appliance doors

GD178-2



Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm Carcase height: 2160 mm

70, 100, 150 oder 200 mm Plinth height:

XL Tall units



XL Pantry unit

- 3 doors, 2 fixed shelves. 4 shelves
- H*-2X 30/40/50/60 cm



XL Pantry unit

- 2 doors,
- 1 fixed shelf,
- 5 shelves


HDV*-2X 30/40/50/60 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-2X 30/40 cm



XL Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2X 30/40 cm



XL Broom cupboard

- 1 door,
- 1 fixed shelf, 1 shelf,
- 1 lug connected door, 1 system grid,
- 2 baskets for cleaning
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards



XL Tall unit

- 1 door,
- 1 lug connected door,
- 5 internal pull-outs,
- 1 fixed shelf,
- 1 shelf

HI*-2X 40/50/60 cm

XL Appliance housing for ovens, microwaves, steam cookers, compact appliances



XL Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel, 3 shelves

GO-2X



XL Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer,
- 2 shelves

GOS-2X



XL Oven housing aperture height: 590 mm

- 1 door,
- 1 shelf
- 1 fixed compensation panel,
- 1 drawer,
- 2 pull-outs

GOS2A-2X



XL Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door,
- 1 fixed compensation panel,
- 2 pull-outs

GMO2A-2X



XL Appliance housing for oven and microwave with lifting door

aperture height: 370 mm aperture height: 590 mm 2 doors.

- 1 lifting door,
- 1 fixed compensation panel,



XL Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 pull-outs

XL Appliance housings with aperture height up to 880 mm



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 2 shelves

G88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door, 2 shelves

GD88-2X



XL Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf.
- 1 appliance door, 2 pull-outs

G88A-2X

XL Appliance housings with aperture height up to 1230 mm



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 flap,
- 1 internal panel.
- 1 appliance door,
- 1 door.
- 1 shelf

G123-2X



XL Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door 1 shelf
- 1 internal panel 1 appliance door,
- 1 pull-out

G123A-2X



XL Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 1 shelf,
- 1 appliance door for freezer compartment,
- 1 internal panel, 1 appliance door for
- fridge section

Tall units in XL height, height 2 XL - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm



XL Appliance housing for fridge / freezer aperture height: 1450 mm

2 appliance doors

GD145-2X

573 933 645

XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm

- 1 door, 1 shelf,
- 1 internal panel, 2 appliance doors,
- G145-2X

XL Fillers / Cladding



XL Filler Carcase material, 2160 mm high, U-shaped seal for connection to wall width: 230 mm

HPK20-2X 20 cm



XL Front filler Continuous front material, width: 200 mm

HPD20-2X 20 cm

XL Appliance housings with aperture height between 1580 - 1780 mm



XL Appliance housing for fridge / freezer aperture height: 1780 mm

1 flap,

2 appliance doors

GD178-2X





Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm Carcase height: 2160 mm

70, 100, 150 oder 200 mm Plinth height:





Pantry unit

- 3 doors, 2 fixed shelves. 4 shelves
- H*-3 30/40/50/60 cm




Pantry unit

- 2 doors, 1 fixed shelf,
- 4 shelves
- HDV*-3 30/40/50/60 cm



Larder unit

- 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable
- HA*-3 30/40 cm



Larder unit

1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-3 30/40 cm



Broom cupboard

- 1 door,
- 1 fixed shelf,
- 1 shelf,
- 1 lug connected door,
- 1 system grid, 2 baskets for cleaning
- 1 system shelf,
- 1 hose rack for vacuum cleaner.
- 2 pegboards



Tall unit

- 1 door,
- 1 lug connected door,
- 5 internal pull-outs,
- 1 fixed shelf,

HI*-3 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances



Oven housing aperture height: 590 mm

- 1 fixed compensation panel, 3 shelves



Oven housing aperture height: 590 mm

- 2 doors.
- 1 fixed compensation panel,
- 1 drawer,
- 3 shelves

GOS-3



Oven housing aperture height: 590 mm

- 1 door, 2 shelves
- 1 fixed compensation panel,
- 1 drawer,
- 2 pull-outs

GOS2A-3



Appliance housing for oven and microwave aperture height: 380 mm aperture height: 590 mm

- 1 door, 1 shelf.
- 1 fixed compensation panel,
- 1 pull-out

GMO-3



Appliance housing for oven and microwave with lifting door

- aperture height: 370 mm aperture height: 590 mm 2 doors.
- 1 lifting door,
- 1 fixed compensation panel,
- 2 shelves



Appliance housing for oven and microwave with lifting door aperture height: 370 mm aperture height: 590 mm

- 1 door.
- 1 shelf
- 1 lifting door,
- 1 fixed compensation panel, 2 pull-outs

Appliance housings with aperture height up to 880 mm



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door,
- 2 shelves

G88-3



Appliance housing for integrated fridge aperture height: 880 mm

- 2 doors.
- 1 appliance door, 2 shelves

GD88-3



Appliance housing for integrated fridge aperture height: 880 mm 1 door

- 1 shelf
- 1 appliance door, 2 pull-outs

G88A-3

Appliance housings with aperture height up to 1230 mm



for integrated fridge aperture height: 1230 mm

Appliance housing

- 1 flap,
- 1 internal panel.
- 1 appliance door,
- 1 door.
- 1 shelf

573 1293 285

Appliance housing for integrated fridge aperture height: 1230 mm

- 1 door
- 1 shelf
- 1 internal panel
- 1 appliance door,
- 1 pull-out

G123A-3



Appliance housing for integrated fridge / freezer aperture height: 1230 mm

- 1 door,
- 2 shelves,
- 1 appliance door for freezer compartment,
- 1 internal panel,
- 1 appliance door for

Tall units, height 3 - 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm

Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm



Appliance housing for fridge / freezer aperture height: 1450 mm

- 1 internal panel,
- 1 shelf,
- 2 appliance doors

GD145-3



Appliance housing for integrated fridge / freezer aperture height: 1450 mm

G145-3

1 door, 1 shelf, 1 internal panel, 2 appliance doors,

Fillers / Cladding



Filler

Carcase material, 2160 mm high, U-shaped seal for connection to wall width: 230 mm

HPK20-3 20 cm



Continuous front material, width: 200 mm

HPD20-3 20 cm

Appliance housings with aperture height between 1580 - 1780 mm



Appliance housing for fridge / freezer aperture height: 1780 mm

- 1 flap,
- 2 appliance doors





Wall units, 360 mm high

Carcase depth: 350 mm Carcase height: 360 mm

Wall units 360 mm high



Wall unit 1 door

W*-36 45/50/60 cm



Wall unit with flap door 1 flap, opening angle 107°

WK*-36 45/50/60/80/90/100/ 120 cm



WKG*-36 50/60/80/90/100/ 120 cm

Wall unit with framed glass flap door

1 framed glass flap door, clear glass No. 01, opening angle 107°, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 360 mm high



WKSQ*-36 50/60/80/90/100/ 120 cm

Wall unit with glass doors Square

1 aluminium framed flap, opening angle 107°, handleless version with wall unit bottom shelf with attached profile strip in stainless steel appearance

Available in:


No. 321 Aluminium framed front in stainless steel appearance with 02 Matt glass No. 308 Aluminium framed front in stainless steel appearance with 035 Grey glass No. 329 Aluminium framed front in Black with 39 Black glass

Fillers



Filler Carcase material, 360 mm high, U-shaped seal for connection to wall width: 100/200 mm

10/20 cm



Front filler Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

WPD20-36 20 cm



Wall units, height 1 - 720 mm high

Carcase depth: 350 mm Carcase height: 720 mm

Wall units 720 mm high



Wall unit

1 door 2 shelf

W*-1

20/25/30/35/40/45/50/55/60 cm



Wall unit 2 doors. 2 shelves

W2T-1 60 cm W*-1 80/90/100 cm



Wall unit

2 doors hinged parallel 2 shelves

W2TP*-1 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-1 60 cm



WG*-1 45/50/60 cm

Wall unit, framed glass door

1 door. clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-1 90/100 cm

Wall unit, framed glass doors

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-1 45/50/60 cm

Wall unit, segmented glass door 1 door.

clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39

Wall units 720 mm high



WGLS-1 90/100 cm

Wall unit, segmented glass doors

2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass



Wall unit, folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

WFL*-1 50/60/80/90/100/120 cm



50/60/80/90/100/120 cm

WFLG*-1

Wall unit, folding/lifting door

1 folding/lifting door, 1 top original front, 1 bottom framed glass front, clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-1 50/60 cm

717

WED65-1

Corner wall unit,





WE*-1 60/65/80/90 cm

Corner wall unit 2 doors

with 165° hinges, 2 shelves, hinged side = first door to be opened

Wall units 720 mm high



WE60-20-1 WE80-35-1 WE90-45-1

Corner wall unit

1 door 1 angle filler. 2 shelves Carcase widths:

600 mm - door width: 194 mm 782 mm - door width: 344 mm 882 mm - door width: 444 mm

Planning dimensions: WE60-20: **450 x 650 mm**. variable between 390 - 500 x 630 - 700 mm WE80-35: 450 x 800 mm, variable between 390 - 500 x 790 - 850 mm WE90-45: **450 x 900 mm**, variable between 390 - 500 x 890 - 950 mm



Open shelf wall unit

2 fixed shelves, side depth: 371 mm

WR*-1 15/20/30/40/45/50/60 cm



Wall unit as bottle rack 4 fixed shelves. side depth: 371 mm

WRF15-1 15 cm

Fillers



Filler

Carcase material, 720 mm high, U-shaped seal for connection to wall

Front filler

WPK*-1 10/20 cm




WPD20-1 20 cm

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width 200 mm

Wall units, height 2 - 792 mm high

Carcase depth: 350 mm Carcase height: 792 mm

Wall units 792 mm high



Wall unit

1 door. 2 shelves

W*-2 20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors, 2 shelves

W2T*-2 60 cm W*-2 80/90/100 cm



Wall unit

2 doors hinged parallel, 2 shelves

W2TP*-2 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-2 60 cm

WG*-2

45/50/60 cm



Wall unit. framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-2 90/100 cm

WGLS*-2

45/50/60 cm

Wall unit, framed glass doors 2 doors,

clear glass No. 01. 2 glass shelves, glass variants against surcharge: no. 02 / 39



Wall unit, segmented glass door

1 door. clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



Wall unit, segmented glass doors 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

90/100 cm No image

MP-GW

WGLS*-2

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 792 mm high



Wall unit for microwave

1 aperture depending on appliance height, 1 flap as niche compensation

WM*-2 50/60 cm



Corner wall unit,

diagonal 1 door, 394 mm wide, opening angle 90°, 2 shelves Planning dimensions: 650 x 650 mm



Corner wall unit 2 doors

with 165° hinges, 2 shelves, hinged side = first door to be opened

WE*-2 60/65/80/90 cm



WE60-20-2 WE80-35-2 WE90-45-2

Corner wall unit

1 door, 1 angle filler, 2 shelves Carcase widths:

600 mm - door width: 194 mm 782 mm - door width: 344 mm 882 mm - door width: 444 mm

Required floor space / Planning dimensions: NWE60-20: **450 x 650 mm**, variable between 390 - 500 x 630 - 700 mm NWE90-45: 450 x 900 mm, variable between 390 - 500 x 890 - 950 mm



Open shelf wall unit 2 fixed shelves, side depth: 371 mm

WR*-2 15/20/30/40/45/50/60 cm




15 cm

Wall unit as bottle rack 4 fixed shelves,

side depth: 371 mm, width: 150 mm

Wall units 792 mm high



Wall unit. folding/lifting door

1 folding/lifting door, 2 original fronts, 2 shelves

WFL*-2 50/60/80/90/100/120 cm



Wall unit, folding/lifting door

1 folding/lifting door, 1 top original front,

1 bottom framed glass front, clear glass no. 01,

2 glass shelves, glass variants against 50/60/80/90/100/120 cm surcharge: no. 02 / 39

Fillers



WFI G*-2

Filler

Carcase material, 792 mm high, U-shaped seal for connection to wall width: 100 mm / 200 mm

10/20 cm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm

20 cm

Wall units, height 3 - 864 mm high

Carcase depth: 350 mm Carcase height: 864 mm

Wall units 864 mm high



Wall unit

1 door, 2 shelves

W*-3 20/25/30/35/40/45/50/55/60 cm



Wall unit

2 doors, 2 shelves

W2T*-3 60 cm **W*-3** 80/90/100 cm



Wall unit

2 doors hinged parallel, 2 shelves

W2TP*-3 80/90/100 cm



Wall unit

1 folding door with slide mechanism, 2 shelves

WFT60-3 60 cm



WG*-3 45/50/60 cm

Wall unit, framed glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WG*-3 90/100 cm

WGLS*-3

45/50/60 cm

Wall unit, framed glass doors 2 doors,

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



Wall unit, segmented glass door

1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39



WGLS*-3 90/100 cm

Wall unit, segmented glass doors 2 doors.

clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39

No image

MP-GW

Surcharge for different glass choice

for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 864 mm high



Wall unit for microwave

1 aperture depending on appliance height, 1 door as niche compensation, 1 shelf

WM*-3 50/60 cm



Corner wall unit, diagonal

1 door, 394 mm wide, opening angle 90°, 2 shelves Planning dimensions: 650 x 650 mm



Corner wall unit 2 doors

2 doors with 165° hinges, 2 shelves, hinged side = first door to be opened

WE*-3 60/65/80/90 cm



WE60-20-3 WE80-35-3 WE90-45-3 Corner wall unit

1 door, 1 angle filler, 2 shelves Carcase widths:

600 mm - door width: 194 mm 782 mm - door width: 344 mm 882 mm - door width: 444 mm

Required floor space / Planning dimensions: NWE60-20: **450 x 650 mm**, variable between 390 - 500 x 630 - 700 mm NWE90-45: **450 x 900 mm**, variable between 390 - 500 x 890 - 950 mm



Open shelf wall unit 2 fixed shelves, side depth: 371 mm

WR*-3 15/20/30/40/45/50/60 cm



15 cm

Wall unit as bottle rack 5 fixed shelves, side depth: 371 mm.

width: 150 mm

Wall units for cooker hoods

Wall units for cooker hoods



Wall unit for slimline cooker hoods

internal panel, metal grids, 80 mm deep, the number of metal grids depends on the built-in dimensions of the cooker hood.

WDAF60-57 60 cm

height: 576 mm

WDAF60-1 60 cm

height: 720 mm

WDAF60-2 60 cm

height: 792 mm

WDAF60-3 60 cm

height: 864 mm

Bridging shelf




Bridging shelf in carcase material

laminated on both faces in the same colour, 16 mm thick, 350 mm deep, with edging material on 3 sides, for fitting between wall units or as a window bridging. Price per running 100 mm, invoiced per started 100 mm. Width: 250 - 2580 mm

WZB60

Bridging shelf in carcase material as above, however 600 mm wide

Fillers



Filler

Carcase material, 864 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm



Front filler

Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm


Accessories

Plastic cutlery trays and pull-out organisers




30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Trend grey, height: 43 mm, fits drawer depth of 500 mm, side depth 561 mm



BE* -46 45/50/60/80/90/ 100/120 cm

as above, however for drawer depth 400 mm, side depth 461 mm





30/40/45/50/60/80/ 90/100/120 cm


Cutlery tray Move

silver-grey, with dividers for customisable divisions, height: 47 mm, fits drawer depth of 500 mm, side depth 561 mm



BE* -46 M 45/50/60/80/90/ 100/120 cm

as above, however for drawer depth 400 mm, side depth 461 mm





AUO 56

Universal organiser

Alu profile with 4 dividers for individualised divisions, height: 125 mm, fits pull-out depth of 500 mm, side depth: 561 mm,

1 alu profile of 600 mm width, 2 alu profiles of 800 up to 900 mm width,

3 alu profiles of 1000 up to 1200 mm width

Please order the correct number for the unit width!

AUO 46


as above, however for drawer depth 400 mm, side depth 461 mm



BE* C 30/40/45/50/60/80/ 90/100/120 cm

Cutlery tray Concept

Non-slip soft touch surface, anthracite, height: 52 mm, fits drawer depth of 500 mm, side depth: 561 mm





A0* C 60/80/90/100/120 cm

Pull-out organisation concept

Non-slip soft touch surface, anthracite, height: 100 mm, fits pull-out depth of 500 mm, side depth: 561 mm











Accessories


Beech cutlery trays and pull-out organisers



solid beech wood, height: 56 mm, fits drawer depth of 500 mm, side depth 561 mm

Beech wood cutlery tray

BE* H 30/40/45/50/60/80/90/100/120 cm





AOS* H 60/80/90/100/120 cm

Beech wood universal organiser

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth 561 mm,

incl. 7 solid wood partitions in beech for 600 mm width,

incl. 10 solid wood partitions in beech for 800 / 900 / 1000 mm width,

incl. 13 solid wood partitions in beech for 1200 mm width


Oak cutlery trays and pull-out organisers



BEHS*E 40/45/50/60/80/90/ 100/120 cm

Oak wooden segment cutlery tray solid wood design in oak, with anti-slip mat in anthracite, height: 55 mm, segment width: 274 mm, fits drawer depth of 500 mm, side depth: 561 mm,

one wooden segment is delivered up to a width of 600 mm, for widths exceeding 800 mm, two wooden segments are delivered





AOS* E 60/80/90/100/120 cm

Universal organiser, oak

with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm,

incl. 7 solid wood partitions in oak for 600 mm width,

incl. 10 solid wood partitions in oak for 800 / 900 / 1000 mm width,

incl. 13 solid wood partitions in oak for 1200 mm width





Mounting sets



MONSET 1

Mounting set 1

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40/50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut



MONSET 2

Mounting set 2

consisting of:

- 1 ball siphon 1 1/2" with 40 mm drain white
- 1 space-saving connector white 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40/50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
 2 flex hoses acc. to KTW-A, 300 mm long,
- 3/8" x 10 mm with union nut
- 1 hose clip, 16 25mm
- 1 table socket, triple, sockets model F, with contact protection, white with 1500 mm supply line, 3 x 1.5 mm²

Accessories for sink units



FB* 40/45/50/60/80/90/ 100/120 cm

Moisture protection sheet

aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs, fits only for a side depth of 561 mm

FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X)

FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X)



WSMS* 40/45/50/60/80/90/

100/120 cm

Waterproof mat

plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm

Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUL.

Upstands



WAP 200/400/500 cm

Plastic upstand

Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, delivered as strand material.

Available in all worktop décors, also available in:

No. 014 Stainless steel appearance



WAP-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:

- 4 x interior corner 90°
- 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps



WAPN 200/400/500 cm

Upstands for continuous planning with niche cladding

2-piece plastic profile with sealing lip, incl. vertical sealing profile

dimensions: 25 mm high, 25 mm deep,

delivered as strand material.

Available in:

014 Stainless steel appearance, 010 Black



WAPN-Z

WAP accessory bag

matches the plastic upstands WAPN consisting of:


- 4 x interior corner 90° / 2 x interior corner 135°
- 2 x exterior corner 90°
- 2 x set of end caps for WAPN
- 2 x set of end caps for niche cladding


Available in:


014 Stainless steel appearance, 010 Black

Dimensional drawings | Height grid


Height grid, carcase heights










Height grid, XL carcase heights









Height grid, standard and maxi door dimensions

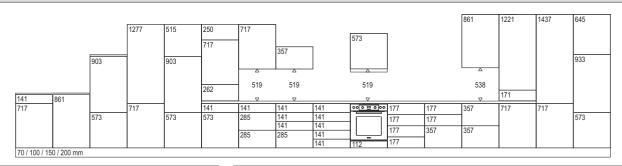

Height grid, standard and maxi door dimensions




Height grid, XL door dimensions

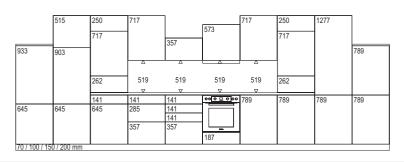

Height grid, tall units











Kurztypenliste 2022

92550

